


## SUNBLOCK (850 g/m<sup>2</sup>) - gama kolorów

### SUNBLOCK GŁADKI, SATYNOWY




### SUNBLOCK LIN (płócienny aspekt powierzchni)

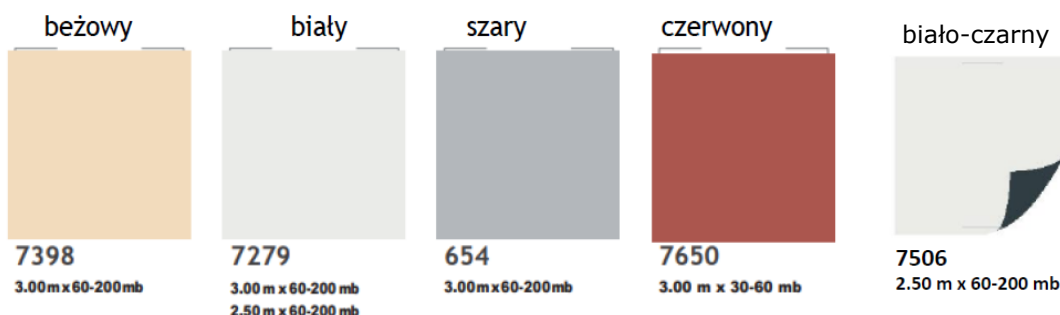


### SUNBLOCK MOSAIC



### SUNBLOCK TEX (tekstylny aspekt powierzchni)

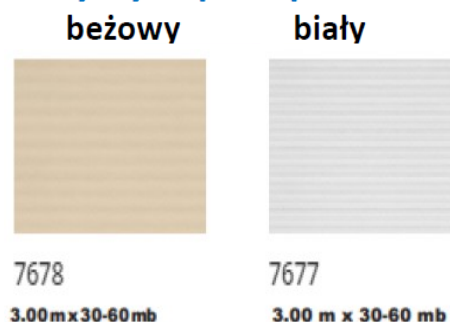

### SUNBLOCK CARBON

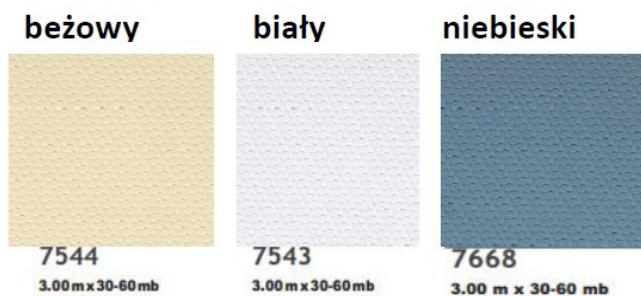

## Sunblock

KOLOR			Gtot EXT	°C			
7506		72	28	0.02		0	
7544		68	32	0.03		0	
7543		72	28	0.02		0	
7668		30	70	0.07		0	
7464		68	32	0.03		0	
7463		72	28	0.02		0	
7469		45	55	0.05		0	
7510		16	84	0.08		0	
7511		68	32	0.03		0	
7512		45	55	0.05		0	
7398		68	32	0.03		0	
7279		72	28	0.02		0	
654		45	55	0.05		0	
7650		26	74	0.07		0	
7678		68	32	0.03		1	
7677		72	28	0.02		2	

**SYSTEM**  
**LOWICK**

- unikalne, przedłużające żywotność, uszczelnienie struktury wewnętrznej zapobiegające pleśnieniu, murszeniu itp. od wewnątrz.

**FINITION**  
**CLEANGARD**

- unikalny lakier odporny na zabrudzenia i łatwy w czyszczeniu.  
**UWAGA:** nie stosować środków myjących zawierających kwasy!